

DYNAPAC



Part of the Atlas Copco Group

CC800

Double drum vibratory rollers



Technical data

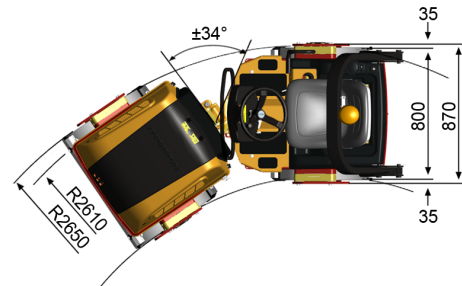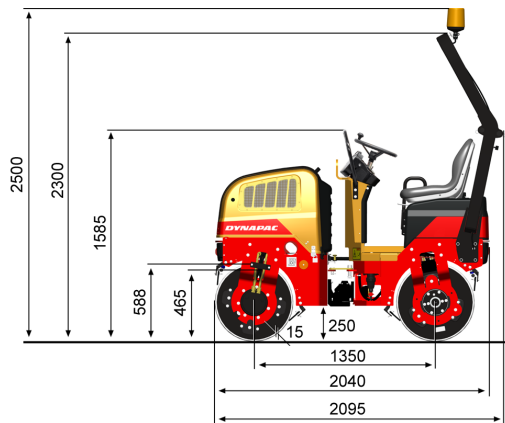

Masses	CC800
Max. operating mass	1,665 kg
Operating mass (incl. ROPS)	1,575 kg
Module mass (front/ rear)	740/ 835 kg
Traction	
Speed range	0-6
Vertical oscillation	±13°
Theor. gradeability	40 %
Compaction	
Centrifugal force	17 kN
Nominal amplitude	0.4 mm
Static linear load (front/ rear)	9.3/ 10.0 kg/ cm
Vibration frequency	70 Hz
Water tank	110 l
Engine	
Manufacturer/ Model	Perkins 403D-11
Type	Water cooled diesel
Rated power, SAE J1995	17 kW (23.5 hp) @ 2,600 rpm
Fuel tank capacity	23 l
Hydraulic system	
Driving	Axial piston pump with variable displacement and servo. 2 radial piston motors with constant displacement.
Vibration	Gear pump/ motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe brake in both drums.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.